



SlowStop® IronFlex Rack End Guard—Type 1 (SS-T1Y-30-HS-xxx)


Color: RAL 1023 Yellow Bollard on RAL 9005 Black Base

Diameter: 76,1mm x 5mm pipe

Height: 30 cm to Centerline (34cm Overall)

Width: 800mm SS-T1Y-30-HS-72
900mm SS-T1Y-30-HS-82
1100mm SS-T1Y-30-HS-102
1200mm SS-T1Y-30-HS-112

Max Tilt: 76mm

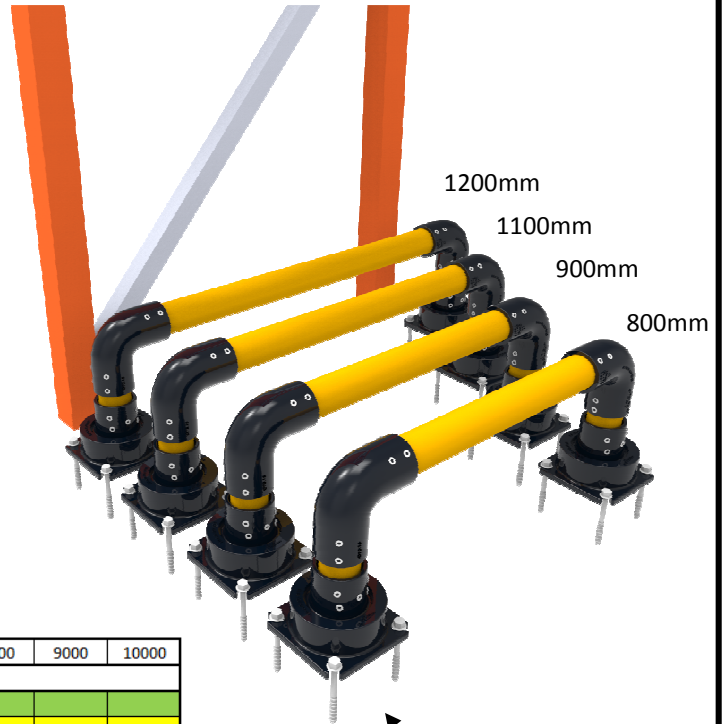

Installs with eight (8) Concrete Anchor Screws

MASS (KG)	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000
3.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
3.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
4.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
4.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
5.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
5.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
6.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
6.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
7.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
7.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
8.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
8.5	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
9.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
10.0	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green

Green: No Damage / Negligible Damage
Yellow: Will Stop / Potential Damage to Guard
Red: Guard is under-sized

SPECIFICATIONS

- Stopping Power Rating: 7.350 joules @ 45° Impact
- Temperature Rating: -40° to 70°C
- Pipe Coating: EN-ISO 1461 Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat.

RECOMMENDED USES



- Pallet and Storage Rack Ends
- Light to Medium Fork Lift Traffic
- Concrete Floors
- Warehouses and Manufacturing Facilities



4955 Stout Dr. • San Antonio, TX 78219
TEL: +1 (210) 736 4477 • FAX: +1 (210) 734 6448

Email: info@slowstop.eu
www.slowstop.eu



QR: Download Spec Sheets
©2019 SlowStop. All rights reserved. 15-NOV-2018