

# SlowStop® Rebounding Horseshoe Bollard – Type 2 (SS-T2Y-61-HS-108)



[www.slowstop.eu](http://www.slowstop.eu)

Color: RAL 1023 Yellow Bollard on RAL 9005 Black Base


Diameter: 101,6 mm (6,3 mm wall)

Height: 61 cm to centerline


Width: 108 cm centers  
118 cm outside uprights  
133 cm overall footprint

Set Screws: M16 x 2,00—8mm Hex

Weight: 80 kg

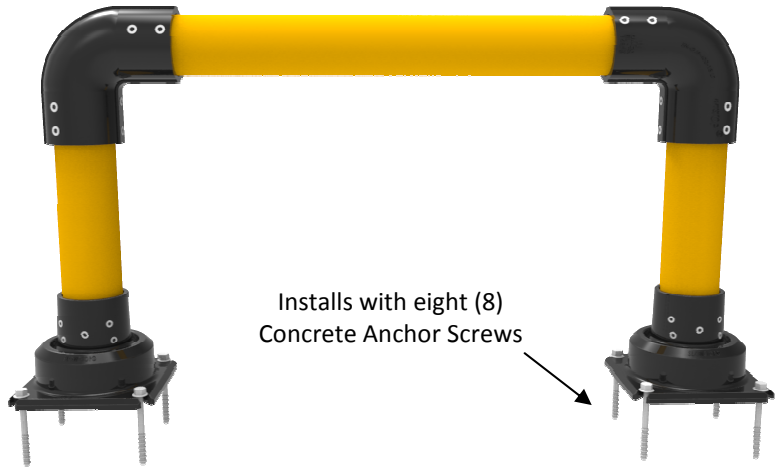

| MASS (KG)   | 1000  | 2000  | 3000  | 4000  | 5000  | 7500  | 10000 | 12500 | 15000 | 20000 |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| SPEED (KPH) |       |       |       |       |       |       |       |       |       |       |
| 3.0         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 3.5         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 4.0         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 4.5         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 5.0         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 5.5         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 6.0         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 6.5         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 7.0         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 7.5         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 8.0         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 8.5         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 9.0         | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |
| 10.0        | Green | Green | Green | Green | Green | Green | Green | Green | Green | Green |



### SPECIFICATIONS

- Stopping Power Rating: 11.908 joules @ 45° Impact
- Temperature Rating: -40° to 70°C
- Pipe Coating: EN-ISO 1461 Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat. C5I corrosion resistance.
- Frangible base eliminates floor damage. Safe for structural concrete.

### RECOMMENDED USES



- Powered Industrial Trucks to 5000 kg lift capacity
- Equipment and Conveyor Guarding
- Toll and Security Booths
- Utility and Kiosk Protection
- Access Denial
- Fuel Pump Protection
- Storage Tanks
- Not for Hostile Vehicle Security



4955 Stout Dr. • San Antonio, TX 78219  
TEL: +1 (210) 736 4477 • FAX: +1 (210) 734 6448

Email: [info@slowstop.eu](mailto:info@slowstop.eu)  
[www.slowstop.eu](http://www.slowstop.eu)



QR: Download Spec Sheets  
©2019 SlowStop. All rights reserved. 15-NOV-2018