



SlowStop® Rebounding Bollard – Type 2.5 (SS-T2.5Y-100)

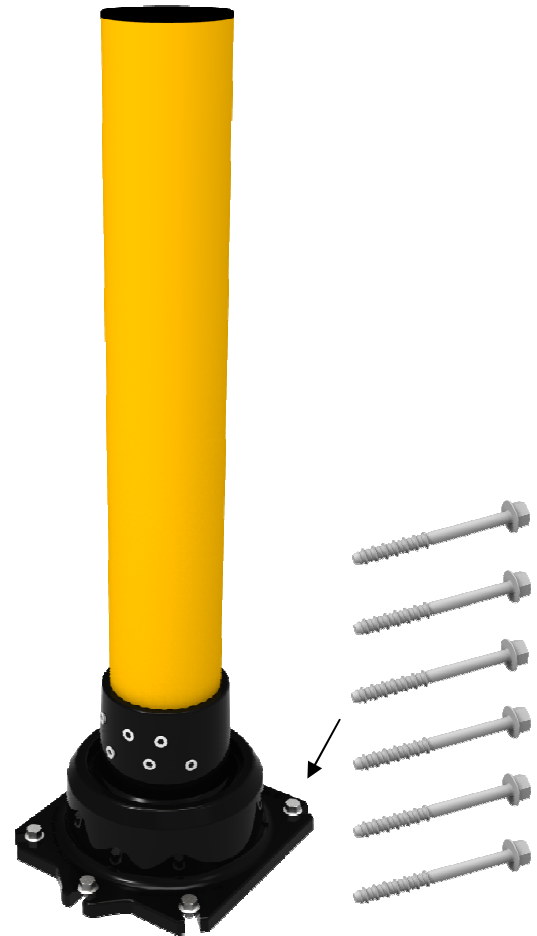

www.slowstop.eu

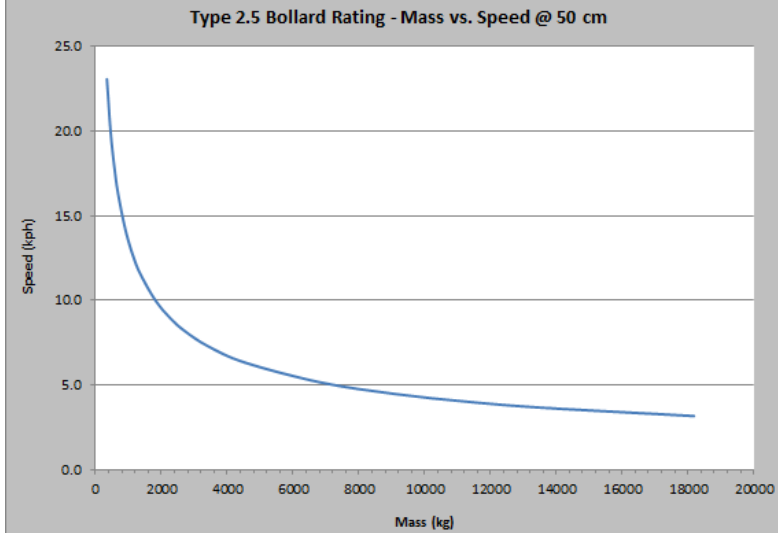

Installs with six (6)
Concrete Anchor Screws

Color: RAL 1023 Yellow Bollard on Black Base

Diameter: 139,7 mm (6,3 mm wall)

Height: 100 cm

Set Screws: 6 M16 x 2,00
8mm Hex

Cap: Black Plastic

SPECIFICATIONS

- Energy Absorption: 7.000 joules
- Temperature Rating: -40°
- Pipe Coating: Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat

RECOMMENDED USES

- Equipment and Storage Rack Guarding
- Drive-Thru Lanes
- Utility Protection
- Pedestrian Safety
- Access Denial
- Fuel Pump Protection
- Structural Concrete Safe
- Not for Hostile Vehicle Security



4955 Stout Dr. • San Antonio, TX 78219
TEL: +1 (210) 736 4477 • FAX: +1 (210) 734 6448
Email: info@slowstop.eu
www.slowstop.eu



QR: Download Spec Sheets
©2017 SlowStop. All rights reserved. 31-MAR-2017