

SlowStop® Rebounding Horseshoe Bollard – Type 3 (SS-T3Y-112-HS-112) Heavy Duty Horseshoe Guarding



www.slowstop.eu

Color: RAL 1023 Yellow Bollard on RAL 9005 Black Base


Diameter: 177,8 mm (8 mm wall)

Height: 112 cm to centerline

Width: 112 cm centers
130 cm outside uprights
153 cm overall footprint


Set Screws: M16 x 2,00—8mm Hex

Weight: 205 kg

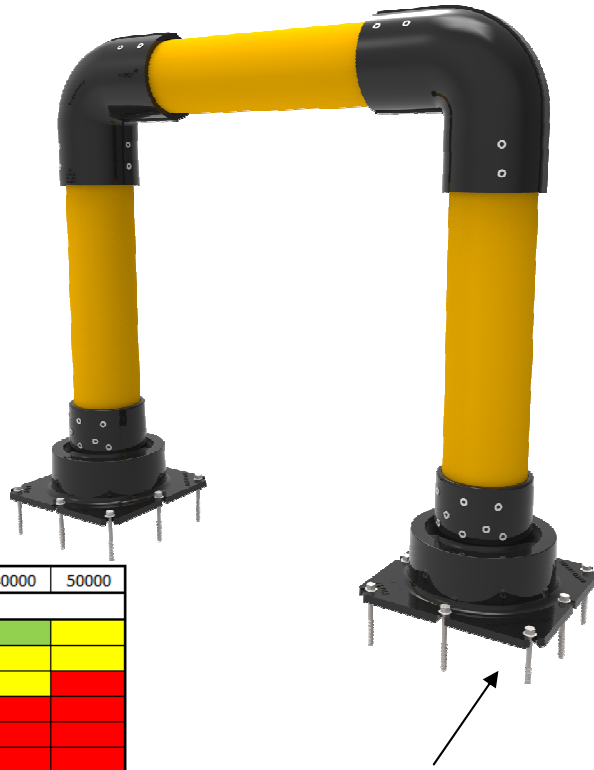

Installs with sixteen (16) Concrete Anchor Screws

MASS (KG)	5000	10000	15000	20000	25000	30000	35000	40000	50000
SPEED (KPH)									
3.0	Green	Green	Green	Green	Green	Green	Green	Green	Yellow
3.5	Green	Green	Green	Green	Green	Green	Green	Yellow	Red
4.0	Green	Green	Green	Green	Yellow	Yellow	Yellow	Red	Red
4.5	Green	Green	Green	Yellow	Yellow	Yellow	Red	Red	Red
5.0	Green	Green	Yellow	Yellow	Yellow	Red	Red	Red	Red
5.5	Green	Yellow	Yellow	Yellow	Red	Red	Red	Red	Red
6.0	Green	Yellow	Yellow	Red	Red	Red	Red	Red	Red
6.5	Green	Yellow	Red	Red	Red	Red	Red	Red	Red
7.0	Green	Yellow	Red	Red	Red	Red	Red	Red	Red
7.5	Green	Yellow	Red	Red	Red	Red	Red	Red	Red
8.0	Green	Yellow	Red	Red	Red	Red	Red	Red	Red
8.5	Green	Yellow	Red	Red	Red	Red	Red	Red	Red
9.0	Yellow	Red	Red	Red	Red	Red	Red	Red	Red
10.0	Yellow	Red	Red	Red	Red	Red	Red	Red	Red



SPECIFICATIONS

- Stopping Power Rating: 30.782 joules @ 45° Impact
- Temperature Rating: -40° to 70°C
- Pipe Coating: EN-ISO 1461 Galvanized + Polyester Powder Coat
- Base Coating: Environmentally Friendly Water-Based KTL Coating + Polyester Powder Coat. C5I corrosion resistance.
- Frangible base eliminates floor damage. Safe for structural concrete.

RECOMMENDED USES

- Powered Industrial Trucks 10000+ kg lift capacity
- Loading Docks and Warehouse Entrance Ramps
- Equipment Guarding
- Heavy Truck Areas
- Generator, Utility, Tank Protection
- Access Denial
- Post-tensioned Concrete
- Not for Hostile Vehicle Security



4955 Stout Dr. • San Antonio, TX 78219
TEL: +1 (210) 736 4477 • FAX: +1 (210) 734 6448
Email: info@slowstop.eu
www.slowstop.eu



QR: Download Spec Sheets
©2019 SlowStop. All rights reserved. 15-NOV-2018