2" ΩmegaPost


High Speed High Performance Delineator

Posts are available in 28", 36", and 42" heights and 2-3/8" (60mm) diameter.

Available in white, yellow, orange and black.

42" model shown with open top. Also available in 3" (76mm) wide 14" long squeeze delineator style or color matched welded cap.



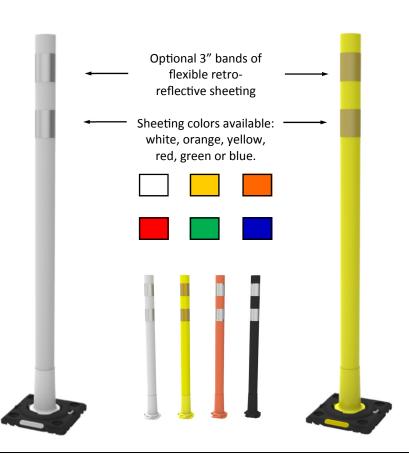

BASE OPTIONS

This product can be used with: Quarter Turn Surface Mount Base in black (standard) or white/yellow (optional).

NEW Tuff Curb XLP and One Base Portables now available in Quarter Turn Socket!



REFLECTOR OPTIONS

Optional reflectors may be added to bases in the white, yellow or red.



SPECIFICATIONS

- Post is constructed of flexible plastic that is resistant to ultraviolet light, ozone, and hydrocarbons.
- Abrasion Resistant Type V Reflective Sheeting
- Galvanized Keeper Pin Requires No Special Tools
- Meets MUTCD Specifications
- Category 1 Self Certified Device
- NTPEP Tested to 200 hits at 70 mph

RECOMMENDED USES

- Managed Lanes
- **HOV Lanes**
- Bike Lanes
- Urban Turn Restrictions
- **High Speed Traffic**
- Corrosive Environments

IMPACT recovery systems

4955 Stout Dr. • San Antonio, TX 78219 210-736-4477 • 800-736-5256 • Fax 210-734-6448 Email: info@impactrecovery.com www.impactrecovery.com



