

REBLOC 60H_12

Standard element

Application
Temporary system

Installation
Free standing

T3	W2
N2	W4


tested according to EN1317-1/2



Containment level	T3 (covers T2, T1)
Working width	W2 (covers W1)
Impact severity level	ASI A
Containment level	N2 (covers N1, T2, T1)
Working width	W4 (covers W5, W6, W7, W8)
Impact severity level	ASI B

Product features & Advantages

- Compact element design (system width 26 cm) with integrated coupling (no loose parts)
- High installation speed: easy and quick installation, relocation and removal
- Reflectors on both sides for guidance, increasing safety & awareness of road users

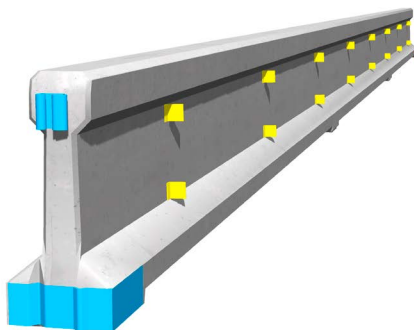

REBLOC® Temporary Systems ensure smooth traffic flow in congested areas. Traffic is separated from construction zones and protects personnel and site machinery from vehicle impact and traffic related incidents.

The compact design is most effective where space is restricted and timelines tight. The 12 m element length is optimal for deployment and use of available space in construction sites.

The REBLOC® coupling system guarantees a safe and quick installation, which is possible at any time of the year and in any weather.

The large contact areas with integrated rubber pads result in a low surface pressure and protect the road surface.

¹⁾ based on an evaluation of the notified body


REBLOC 60H_12

Standard element

T3	W2
N2	W4

Technical data

tested according to EN1317-1/2¹⁾

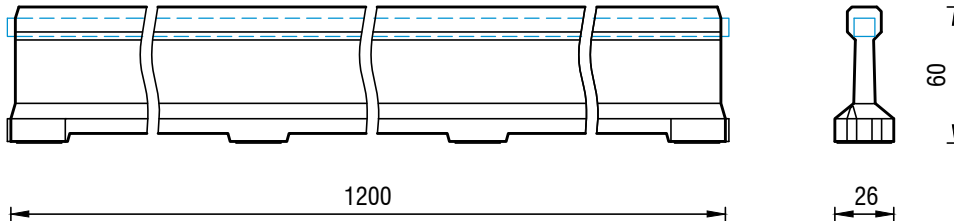


all dimensions in cm

Containment level	T3	N2
Working width	W2	W4
Impact severity level	ASI A	ASI B
Installation	free standing on asphalt/concrete	
Terminal elements	not necessary, optional available	required; REBLOC 60_3T (4 x M20 adhesive anchor)
Dimensions L x W x H in cm	1200 x 26 x 60 cm	
Weight/element	2.180 kg	
Elements/truck (24 t)	11 elements	
Minimum installation length	120 m (not including terminal elements)	
Curve radius	$r \geq 200$ m	
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized	
CE certification	✓ (N2)	
Features	rubber pads in contact areas for protection of the road surface	

System element - combinable



Terminal element
REBLOC 60_3T
(inclination 1:5)



Dilatation element
Length compensation: 41-87 cm

¹⁾ based on an evaluation of the notified body