

REBLOC 80SAQ_12

Standard element

Application
Temporary system

Installation
Free standing

free standing:	T3	W2	free standing:	N2	W3
free standing:	H1	W4	anchored: ¹⁾	N2	W1


tested according to EN1317-1/2



Containment level	T3 (covers T2 and T1)
Working width	W2 (covers W3, W4, W5, W6, W7 and W8)
Containment level	N2 (covers N1, T2 and T1)
Working width	W3 (covers W4, W5, W6, W7 and W8)
Containment level	H1 (covers N1, T3, T2 and T1)
Working width	W4 (covers W5, W6, W7 and W8)
Impact severity level	ASI B

Product features & Advantages

- Compact element design (system width 30 cm) with integrated coupling (no loose parts)
- High installation speed: easy and quick installation, relocation and removal
- Reflectors on both sides for guidance, increasing safety & awareness of road users

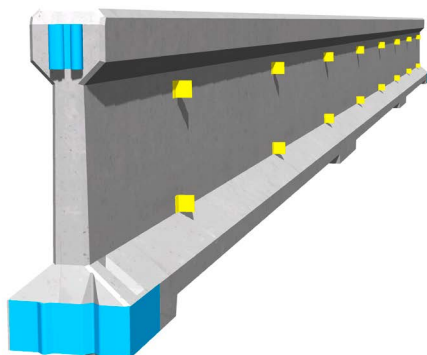

REBLOC® Temporary Systems ensure smooth traffic flow in congested areas. Traffic is separated from construction zones and protects personnel and site machinery from vehicle impact and traffic related incidents.

The compact design is most effective where space is restricted and timelines tight. The 12 m element length is optimal for deployment and use of available space in construction sites.

The REBLOC® coupling system guarantees a safe and quick installation, which is possible at any time of the year and in any weather.

The large contact areas with integrated rubber pads result in a low surface pressure and protect the road surface.

The REBLOC 80SAQ_12 is also available as anchored N2/W1 system.


¹⁾ details see datasheet REBLOC 80SAQ_12_N2/W1

REBLOC 80SAQ_12

Standard element



Technical data

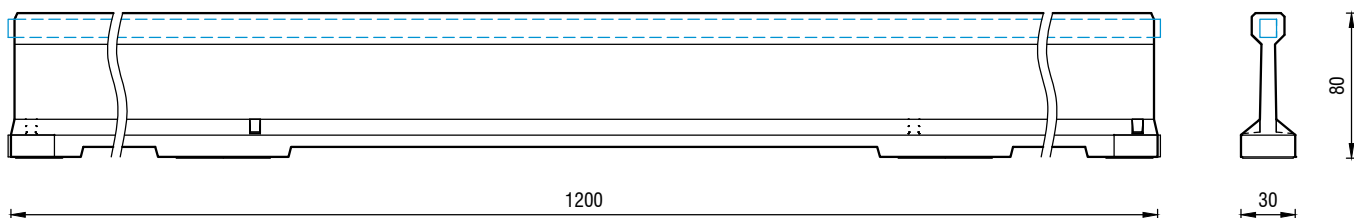

all dimensions in cm

Containment level	T3	N2	H1
Working width	W2	W3	W4
Impact severity level	ASI B	ASI B	ASI B
Installation	free standing on asphalt/concrete		
Terminal elements	required for N2/W3 und H1/W4; REBLOC 80S_4T_S37 (4 x adhesive anchors M20 / 5.8 oder 4 x screwbolts Ø 20/200 mm)		
Dimensions L x W x H in cm	1200 x 30 x 80 cm		
Weight/element	3000 kg		
Elements/truck (24 t)	8 elements		
Minimum installation length	120 m	108 m	120 m
Curve radius	$r \geq 260$ m		
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized		
Features	rubber pads in contact areas for protection of the road surface		
Further application	The system can also be installed anchored with performance data N2/W1.		

System element - combinable



Terminal element
REBLOC 80S_4T_S37
(inclination 1:5)

¹⁾ details see datasheet REBLOC 80SAQ_12_N2/W1