

REBLOC 80SA_6

Standard element

H1

W4

tested according to EN1317-1/2

Application
Temporary system


Installation
Free standing



Containment level **H1** (covers also N1, T3, T2 and T1)
 Working width **W4** (covers also W3, W4, W5, W6, W7 and W8)
 Impact severity level **ASI B**

Product Features

- Short element length of 6 m for high flexibility and urban applications
- Compact element design (system width 30 cm) with integrated coupling (no loose parts)
- Reflectors on both sides for guidance, increasing safety & awareness of road users

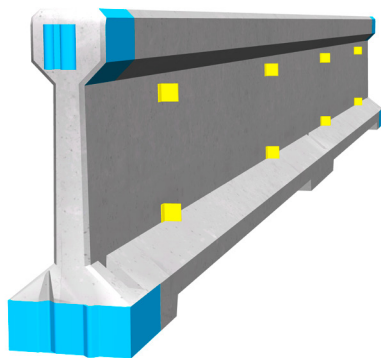

REBLOC® Temporary Systems ensure smooth traffic flow in congested areas. Traffic is separated from construction zones and protects personnel and site machinery from vehicle impact and traffic related incidents.

The compact design is most effective where space is restricted and timelines tight. The 6 m element length is optimal for deployment and use of available space in construction sites.

The REBLOC® coupling system guarantees a safe and quick installation, which is possible at any time of the year and in any weather.

The large contact areas with integrated rubber pads result in a low surface pressure and protect the road surface.


REBLOC 80SA_6

Standard element



tested according to EN1317-1/2

Technical data

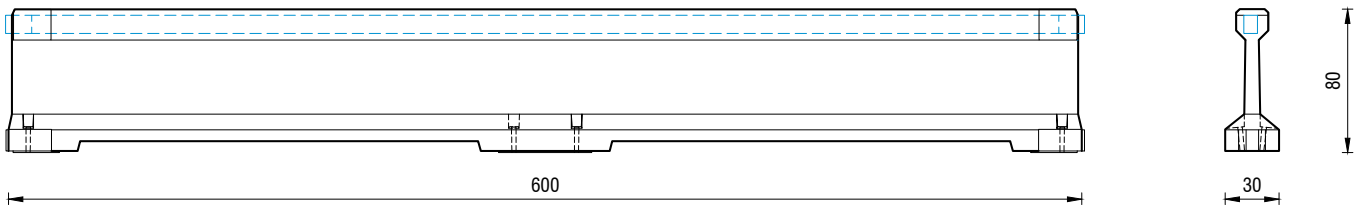

all dimensions in cm

Containment level	H1
Working width	W4
Impact severity level	ASI B
Installation	free standing on asphalt/concrete
Terminal elements	required; REBLOC 80S_4T_S37 (4 x screwbolts Ø 20 mm)
Dimensions L x W x H in cm	600 x 30 x 80 cm
Weight/element	1600 kg
Elements/truck (24 t)	15 elements
Minimum installation length	78 m (13 elements)
Curve radius	$r \geq 130$ m
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Features	rubber pads in contact areas for protection of the road surface

System element - combinable



Terminal element
REBLOC 80S_4T_S37
(inclination 1:5)