

REFENCE 80H_8+124.02

Standard element

Application

Temporary/permanent system with top fence

Installation

Free standing



tested according to EN1317-1/2



Total height

205 cm

Containment level

H1 (covers N1, T3, T2 and T1)

Working width

W5 (covers W4, W5, W6, W7 and W8)


Impact severity level

ASI B



Product features & Advantages

- Concrete barrier with integrated top fence for separation of construction site and traffic area
- Modular system and high flexibility for temporary usage (relocation possible)
- High installation speed: quick and efficient installation in any weather conditions

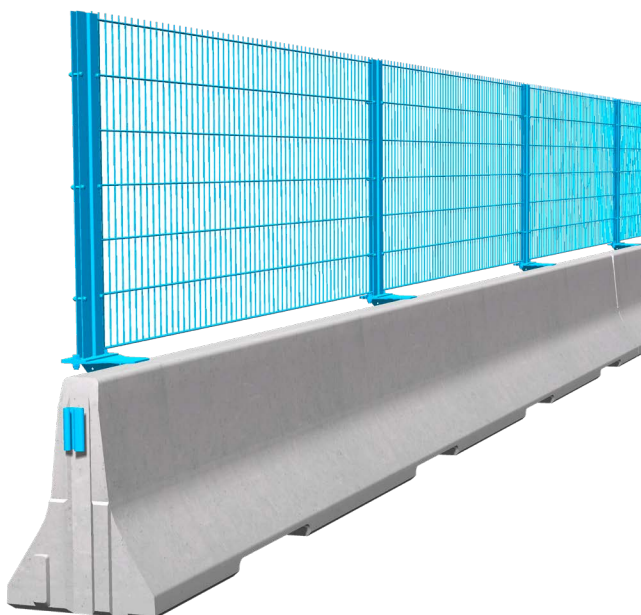

REBLOC® systems ensure smooth traffic flow in congested areas. Traffic is separated from construction zones and protects personnel and site machinery from vehicle impact and traffic related incidents.

The system includes an integrated top fence as a climb over and sight protection to increase safety at the construction site. The well-designed construction is characterized by stability and a cost and space-saving installation.

The REFENCE system guarantees a safe and quick installation, which is possible at any time of the year and in any weather.

The integrated, innovative coupling with no loose parts helps to prevent installation errors and reduces the risk of vandalism.


REFENCE 80H_8+124.02

Standard element



tested according to EN1317-1/2


Technical data

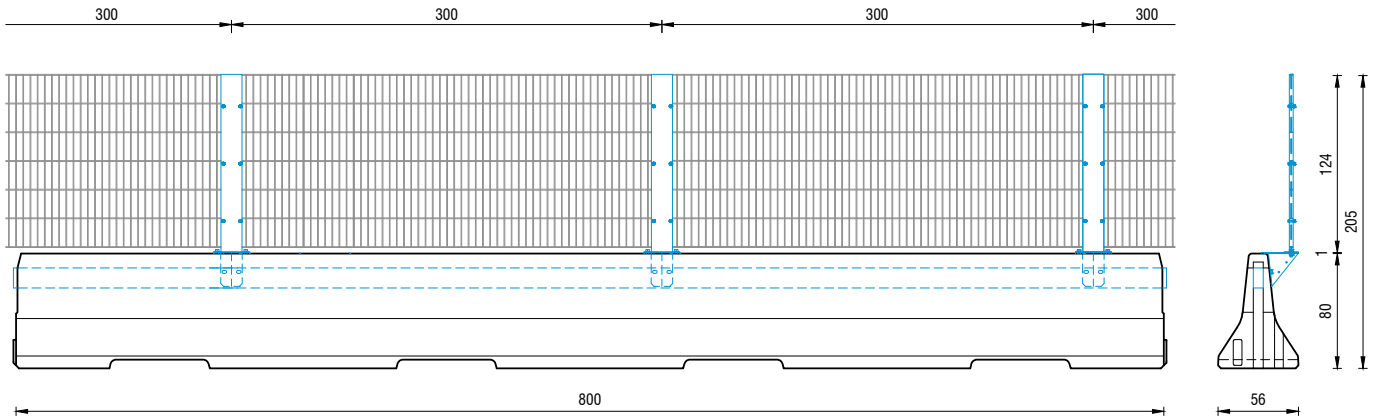

all dimensions in cm

Containment level	H1
Working width	W5
Impact severity level	ASI B
Vehicle intrusion	VI4
Installation	free standing on asphalt/concrete
Terminal elements	required; REBLOC 80H_4T (2 x screwbolts Ø 20 mm)
Dimensions L x W x H in cm	800 x 56 x 205 cm (height concrete element 80 cm + height top fence 124 cm + height bracket plate 1 cm)
Weight/element	4.000 kg (concrete element)
Elements/truck (24 t)	6 elements
Min. installation length concrete elements	80 m (not including terminal elements)
Min. installation length top fence	63 m
Curve radius	$r \geq 225$ m
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓

System element - combinable



Terminal element
REBLOC 80H_4T
(inclination 1:5)